

PULSATION DAMPENERS

EQUAFLUX 51

MADE IN ITALY




- **Product of Italian origin**
- Works with **non**-lubricated air
- Idles without damage
- High output and sturdiness
- Suitable for minimising flow pulsations
- Suitable for minimising vibration during pumping
- Atex Zone 1 (*on request*) - Atex zone 2 standard




 **STANDARD:** II 3/3 GD c IIB T135°C (zone 2)
CONDUCT: II 2/2 GD c IIB T135°C (zone 1)

Ex STANDARD: II 3/3 GD c IIB T135°C (zone 2)
CONDUCT: II 2/2 GD c IIB T135°C (zone 1)


AVAILABLE MATERIALS

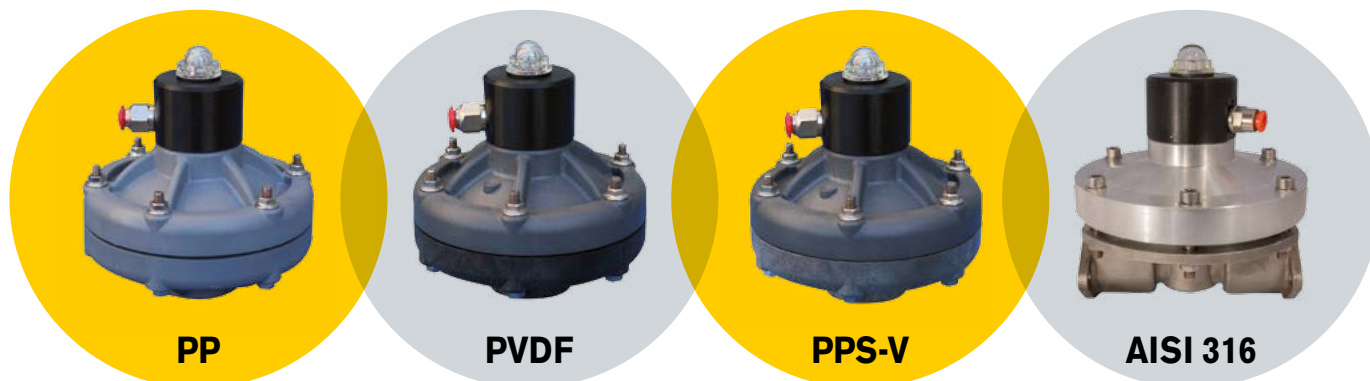

E51
PP/PVDF/PPS-V

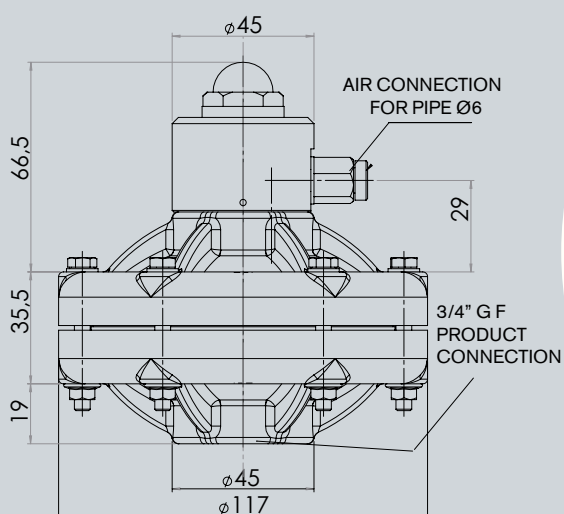

E51
AISI 316

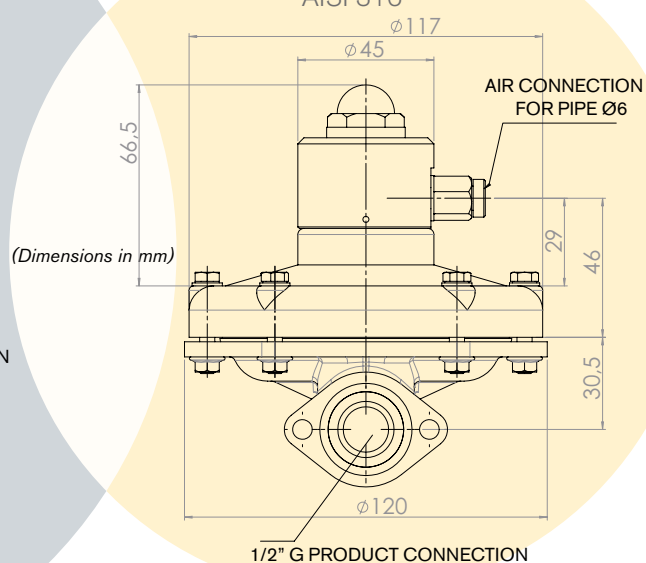

PRODUCT CONNECTION	AIR CONNECTION	MAX. AIR SUPPLY PRESSURE	APPLICABILITY	MATERIAL	WEIGHT	OPERATING TEMPERATURE	DIMENSION (mm)
G 3/4"	ø 6 mm	7 bar	MIDGETBOX PP, CUBIC 15 PP, MICROBOXER PP	PP	0,5 Kg	min +3°C max. +65°C	121x117
G 3/4"	ø 6 mm	7 bar	CUBIC 15 ECTFE, MICROBOXER PVDF	PVDF	0,5 Kg	min +3°C max. +95°C	121x117
G 3/4"	ø 6 mm	7 bar	MICROBOXER ALLUMINIO	PPS-V	0,6 Kg	min +3°C max. +95°C	121x117
G 1/2"	ø 6 mm	7 bar	MICROBOXER AISI 316	AISI 316	1,33 Kg	min +3°C max. +95°C	133x117